

- ★ *HIGHT QUALITY SINE WAVE UPS*
- ★ *5 YEARS WARRANTY*
- ★ *51 MW INSTALLED POWER*
- ★ *30 YEARS OF PRODUCTION*



## UPS WARRANTY

### WE GURANTUEE:

- PROPER UPS OPERATION, IN ACCORDANCE WITH CHARACHERISTICS.
- IF UPS IS USED IN ACCORDANCE WITH USER MANUAL.
- FREE REPAIR AND REPLACEMENT OF DEFECTIVE PARTS.
- AVAILABILITY OF SPARE PARTS WITHIN **5 YEARS** AFTER THE EXPIRATION OF THE WARRANTY.

### THE WARRANTY IS NOT VALID IN FOLLOWING CASES:

- UPS WAS NOT USED IN ACCORDANCE WITH THE MANUAL USER.
- BATTERIES DISCHARGED AND LEFT EMPTY FOR MORE THAN 10 DAYS.
- UNAUTHORIZED REPAIR.
- DAMAGES IN TRANSPORT OR IMPROPER HANDLING.
- COMPLAINTS OUTSIDE THE WARRANTY PERIOD.
- THUNDER STRIKE, FLOOD, EARTHQUAKE.
- ENVIRONMENTAL OPERATING CONDITIONS NOT APPROVED FOR THE PURCHASED MODEL.

### GUARANTEE DURATION PERIOD AND CONDITIONS:

- SMART and LIGHT SINUS UPS: 5 YEARS / CATV, RP and TP MODEL UPS: 3 YEARS
- BATTERIES: 2 YEARS UNDER FOLLOWING CONDITIONS:
  - IF THE AMBIENT TEMPERATURE DOES NOT EXCEED 30C. BATTERIES CAN WORK AT RAISED TEMPERATURES, BUT THE LIFETIME IS REDUCED, THIS IS THE RECOMMENDATION OF THE MANUFACTURER OF BATTERIES.

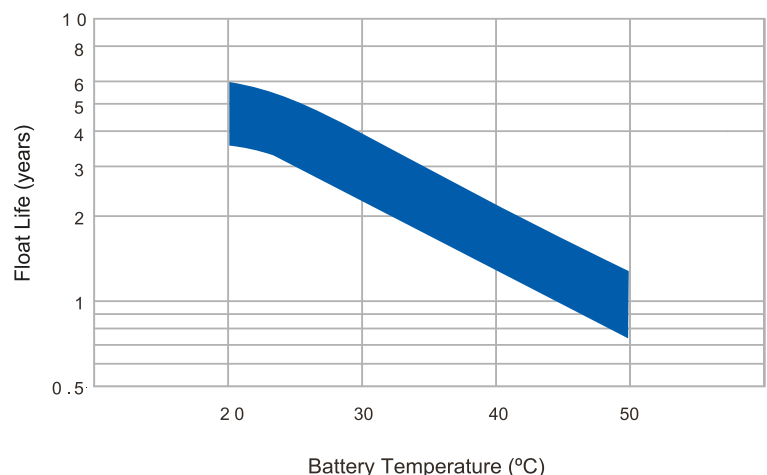


DIAGRAM FROM THE BATTERY  
 MANUFACTURER'S CATALOG SHOWS THE  
 CORRELATION BETWEEN LIFETIME AND  
 AMBIENT TEMPERATURE:

- **WARRANTY PERIOD FOR BATTERIES STARTS WITH THE PRODUCTION DATE OF THE UPS, WHICH CAN BE SEEN ON THE UPS DISPLAY (MENU).**

**NOTE:** THE LIFETIME OF BATTERIES IN OUR UPS DEVICES IS APROX 5 YEARS.

#### NOTES:

- UPS HAVE UNIQUE SERIAL NUMBER LOCATED ON A STICKER.
- ON THE DISPLAY (IN THE MENU) YOU CAN SEE:  
UPS SERIAL NUMBER AND DATE OF PRODUCTION.
- ON THE UPS PACKAGING, THERE IS A GUARANTEE CERTIFICATE WHICH SHOWS THE FOLLOWING INFORMATION:  
UPS MODEL / SERIAL NUMBER / DATE OF SALE / SELLER NAME

#### **UPS MODELS WHICH CAN WORK IN HARD / INDUSTRIAL ENVIRONMENTAL CONDITIONS:**

SPECIAL MODELS WHICH HAVE THE INITIAL LETTERS IN THE MARK: "TP" / "RP" / "C" CAN WORK IN THE CONDITIONS:

- HIGH MOISTURE, CONDESATION, DUST.
- TEMPERATURE RANGE -40°C / +65°C

C3 / C12 / C15 / C22 / C23 / C52

TP12 / TP12b / TP15 / TP22 / TP22D / TP22b / TP25 / TP30 / TP32 / TP52 / TP62 / TP82

TP22LA / TP22LB / TP22LC / TP22LD / TP30L / TP30LD / TP52L / TP82L

RP22 / RP22D / RP22i / RP30 / RP32 / RP52 / RP62

RP30L / RP30LD / RP52L / RP72L

**OTHER UPS MODELS WHICH HAVE THE INITIAL LETTERS IN THE MARK: "T" OR "R" ARE NOT DESIGNED TO WORK IN CONDITIONS OF HIGH MOISTURE, TEMPERATURE RANGE -20°C DO +60°C.**